

Instructions for Providing a Comfortable and Secure Fit

To size the Sure-Lock® ratchet headband:

1. Turn the ratchet knob counterclockwise until headband is at largest size (Figure 1).
2. Place the helmet on your head and turn ratchet knob clockwise until headband is snug and comfortable.

To adjust helmet vertically:

1. Locate the vertical adjustment tabs at the front and back of the headband. There are four tabs on the headband and four white posts on the inner liner (Figure 2).
2. To raise or lower the headband, reposition the tabs on the white posts and snap in place.

To raise or lower faceshield:

1. Release tension knobs found on both sides of the helmet.
2. Tighten knobs once faceshield is in desired position.



NOTES

- Performance properties of NFPA 1971-2000 cannot be tested users in the field.
- NFPA 1500 requires members who engage in structural fire fighting shall be provided with helmets that meet the requirements of NFPA Standard 1971, Standard on Protective Clothing and Equipment for Structural Fire Fighting.

WARNING

Read all instructions and warnings before wearing this helmet.

After removal from the wearer, the helmet should be inspected for damage and soiling after each use. The helmet should be adjusted by means of the adjustment points provided to permit a proper fit that does not interfere with the SCBA while in use. These adjustments should be done prior to actual structural fire fighting activities. Helmets damaged or deteriorated beyond economical repair should be removed from service.

Failure to follow these instructions could cause death or serious injury.

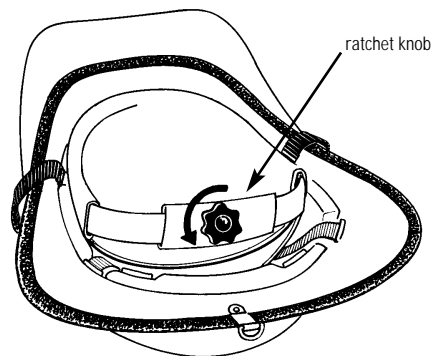


Figure 1


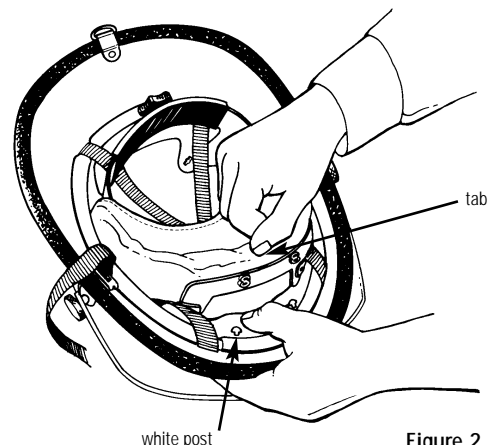


Figure 2

Replacement Parts for UST Series Helmet

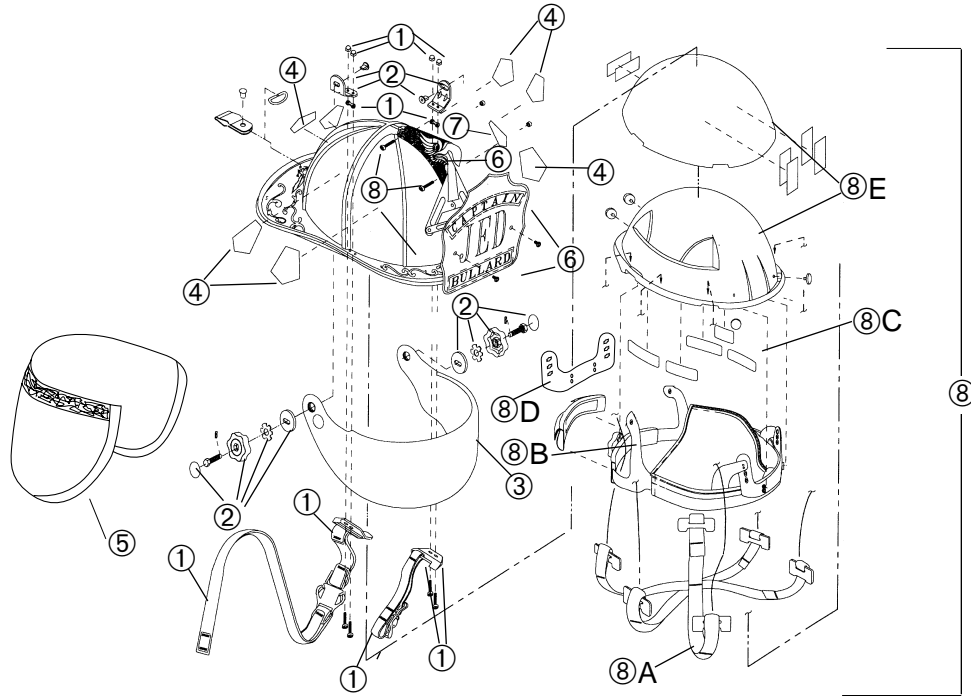

CATALOG NUMBER	DESCRIPTION	CATALOG NUMBER	DESCRIPTION
① R148	Nomex® chin strap with quick-release buckle and Postman's slide fastener	⑧ R940	Replacement inner crown system. Includes: inner shell, Sure-Lock ratchet headband, brow pad, urethane impact liner, 6-point Nomex crown strap assembly, and velcro strips
② R152	Faceshield mounting hardware kit	⑧A R112	Nylon crown straps
③ R309	Bullard Bourke Eyeshield	⑧A R113	Nomex crown straps
③ R330	4" hard-coated PPC faceshield	⑧B R625	Sure-Lock ratchet headband
④ R535	Retro-reflective fluorescent, adhesive-backed strips, 2 3/16" x 2 3/8" Lime-Yellow (set of 8)	⑧C R630	Brow pad
⑤ R721	Rip-Stop Nomex ear/neck protector for UST helmet	⑧D R628	Ratchet height adjuster
⑤ R741	Rip-Stop PBI®/Kevlar® ear/neck protector for UST helmet (not shown)	⑧E	Impact liner/inner shell - Not available individually.
⑤ R726	Nomex ear/neck protector with throat strap (not shown)		
⑥ OR500	Brass front		
⑦ OR501	Brass front reflective decal		
⑧ R920	Replacement inner crown system Includes: inner shell, Sure-Lock® ratchet headband, brow pad, urethane impact liner, 6-point nylon crown strap assembly, and Velcro strips.		

Helmet Model

UST Thermoglas® helmet

Colors: Firedome helmets are available in seven standard colors: white, red, black, yellow, blue, orange and lime-yellow.

Cleaning

Remove ear/neck protector, headband, and crown straps. Clean inner and outer shells with mild soap or detergent. Wash the ear/neck protector, headband, brow pad, and crown straps in warm, soapy water and air dry at room temperature. Clean faceshields with mild detergent, rinse thoroughly with clean water, and dry with a soft cloth.

Decontamination:

Contact Bullard at 877-BULLARD (285-5273) for instructions concerning decontamination procedures.

▲ WARNING

Users should not wear helmets that are not thoroughly cleaned and dried. Failure to follow this instruction could result in death or serious injury.

UST Series Helmets User Manual

Two-Year Limited Warranty

Bullard warrants to the original purchaser that the firefighter helmet is free of defects in materials and workmanship under normal use and service for a period of two (2) years from the date of manufacture. The Bullard obligation under this warranty is limited to repairing or replacing articles that are returned within the warranty period, shown to be defective after inspection by Bullard, and subject to the following limitations:

- Helmet must be returned to Bullard with shipping charges prepaid
- Helmet must not be altered from its original factory configuration
- Helmet must not have been misused, subjected to negligence or damaged in transport

In no event shall Bullard be responsible for damages, loss of use, or other indirect, incidental, consequential or special costs, expenses or damages incurred by the purchaser, notwithstanding that Bullard has been advised of the possibility of such damages.

ANY IMPLIED WARRANTIES, INCLUDING

WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO TWO (2) YEARS FROM THE DATE OF MANUFACTURE OF THIS PRODUCT.

Some states do not allow the exclusion or limitation of incidental or consequential damages, or allow limitations on how long an implied warranty lasts, so the above limitations or exclusion may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

RETURN AUTHORIZATIONS: Contact Customer Service to obtain written permission to return any product. Material returned for credit will be subject to factory inspection. Current products or products under warranty will be subject to a rehandling charge less original freight charge. Obsolete or special order products cannot be returned without written permission.

▲ WARNING

READ ALL INSTRUCTIONS AND WARNINGS BEFORE USING THIS FIREFIGHTER HELMET.

Firedome helmets are constructed with high quality materials and workmanship. They are engineered to provide limited protection against head injuries, when properly adjusted for fit and when worn by firefighters during normal fire fighting activities. They are not designed for direct contact with flames or molten metal, or for protection against hazardous chemicals, biological, or radiological agents. Contact of these fire helmets with live wires should be avoided. NEVER ALTER OR MODIFY the helmet's design or construction without explicit written instructions from Bullard. Inspect your helmet and suspension system regularly, regardless of how often it is used. If you notice any sign of wear, damage, abuse, or environmental degradation, replace the shell and/or suspension immediately. If the helmet has sustained a forcible blow (impact), it must be replaced, even if there is no visible damage.

THIS HELMET MUST BE PROPERLY ADJUSTED AND SECURED TO THE HEAD WITH ALL COMPONENTS IN PLACE, USED AS SPECIFIED IN MANUFACTURER'S INSTRUCTIONS.

Do not modify or replace any component of this helmet, including the shell, energy-absorbing system, retention system, fluorescent retroreflective markings, ear covers, or faceshield with components or accessories other than those certified for use with this product. Modification or replacement with other than Bullard parts voids compliance with NFPA 1971-2000.

NO PROTECTIVE HEADGEAR CAN PROTECT AGAINST ALL FORESEEABLE IMPACTS. For maximum protection under these standards, the helmet must be of good fit and all retention straps must be securely fastened. Use only with a Bullard suspension system. This helmet should be inspected by the user for visible damage prior to each use. Immediately replace shell or suspension at first sign of ear, damage, or degradation.

HELMETS CAN BE SERIOUSLY DAMAGED BY SOME COMMON SUBSTANCES, THOUGH SHOW NO DAMAGE TO THE NAKED EYE. CLEAN ONLY WITH MILD DETERGENT AND WATER. DO NOT USE OR EXPOSE HELMET TO PAINTS, SOLVENTS, CHEMICALS, ADHESIVES, GASOLINE, OR LIKE SUBSTANCES. STORE IN A DARK, COOL PLACE.

Failure to follow these instructions and avoid potentially hazardous situations could result in death or serious injury.

Firedome helmet model UST meets or exceeds all performance specifications under NFPA 1971-2000 as certified by U. S. Testing, US-OSHA and all major state fire helmet standards.

Bullard

It's your life and you're worth it™



Head Protection



Respiratory Protection



Fire and Rescue Safety



Thermal Imaging



Certified
FF115-98-0101



ISO 9001
certified

Bullard
1898 Safety Way
Cynthiana, KY 41031-9303
Toll free: 877-BULLARD (285-5273)
Tel: 859-234-6616
Fax: 859-234-8987
www.bullard.com

Bullard GmbH
Hochkreuzallee 36
53175 Bonn-Bad Godesberg
Germany
Tel: +49 228 931933
Fax: +49 228 242 2853

©2000 Bullard. All rights reserved including the right of reproduction, in whole or in part, in any form.
Bullard, Sure-Lock, and Hard Boiled are registered trademarks of Bullard.
It's your life and you're worth it is a trademark of Bullard.
Nomex and Kevlar are registered trademarks of E.I. du Pont de Nemours & Company.
PBI is a registered trademark of Celanese Corporation.
U.S. Patent No. 5,150,479.

6024705586 (1000)